

**Instructions for setting up a dial-up connection, mail account and newsgroup server setup on a Macintosh running OS8 for Tech Info Internet service**

**Summary of server information**

The 33.6k modem number is: **(03) 9432 7222**  
The 56k modem number is: **(03) 9433 4444**  
Home page for TECH INFO is: <http://www.techinfo.com.au>  
Primary name server address (Primary DNS): **203.63.149.1**  
Secondary name server address (Secondary DNS): **203.63.149.2**  
Incoming mail server name (POP3 server name) is: **mail.techinfo.com.au** on port: **110**  
Outgoing mail server name (SMTP server name) is: **mail.techinfo.com.au** on port: **25**  
Proxy server name is: **proxy.techinfo.com.au** on port: **8080**  
News server name is: **news.techinfo.com.au** on port: **119**




To start the configuration of the Internet for Mac OS 8.0,  
Double click on the icon marked 'Browse the Internet'.

**Browse the Internet**





To continue through the configuration, click on the button marked **'Assist Me'**

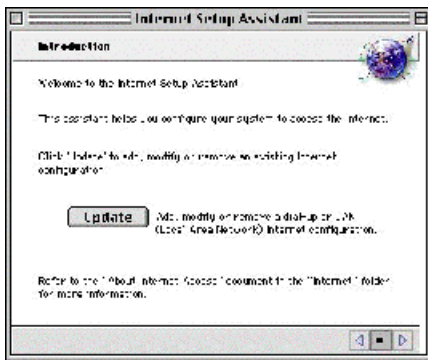


You will be shown an introduction screen next, to continue click on the button marked **'Update'**.

Now select **'Add Internet configuration'**, then to continue click on the arrow pointing right located at the bottom right hand of the screen.

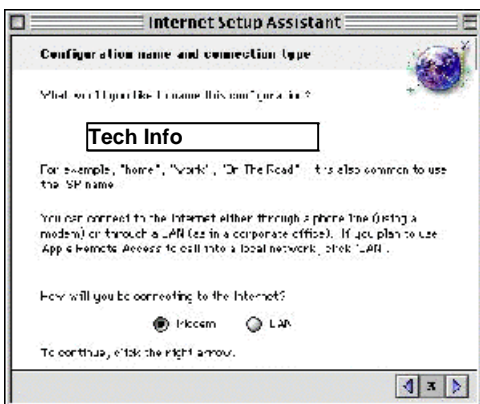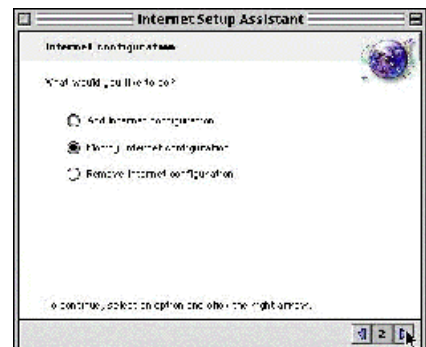

In the field labelled **'What would you like to name this configuration'** type **"Tech Info"**.

Next to **'How will you be connecting to the Internet'** select **'Modem'**, then to continue click on the arrow pointing right located at the bottom right hand of the screen.

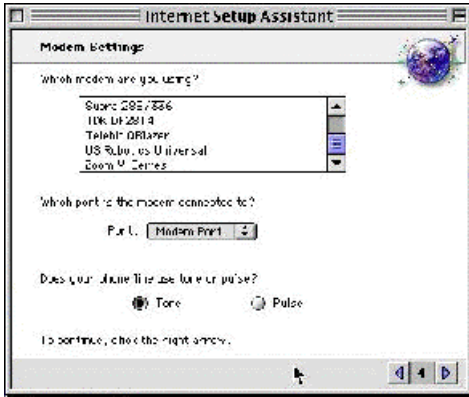



Select your modem from the list in this next window, if your modem is not listed, select: **'Hayes Optima/Accura 28.8K'** as this modem is a generic type of modem.  
 Select 'Modem Port' from the list option box marked **'What port is the modem connected to?'** and select **'Tone'** from the radio boxes below.

To continue click on the arrow pointing right located at the bottom right hand of the screen.

Make sure the modem (phone) number is set to **9433-4444**

Also enter your username and password into fields respectively.

To continue click on the arrow pointing right located at the bottom right hand of the screen.

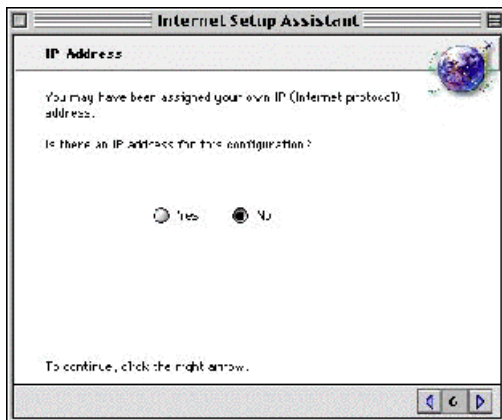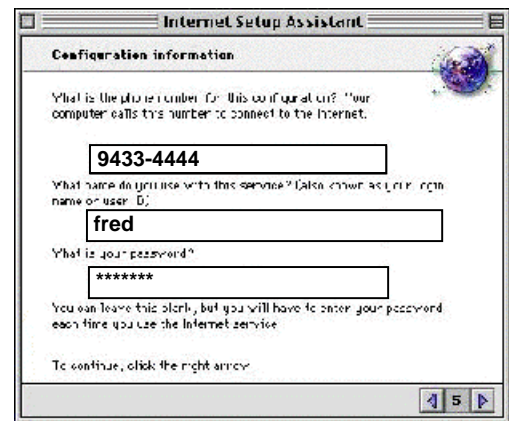

In the next screen select 'No' as we automatically assign an IP Address to your machine each time your machine logs in.

To continue click on the arrow pointing right located at the bottom right hand of the screen.




The next screen will prompt you for a list of DNS Servers enter the following numbers:

Primary DNS: **203.63.149.1**

Secondary DNS: **203.63.149.2**

In the domain name field, type in:- **techinfo.com.au**

To continue click on the arrow pointing right located at the bottom right hand of the screen.

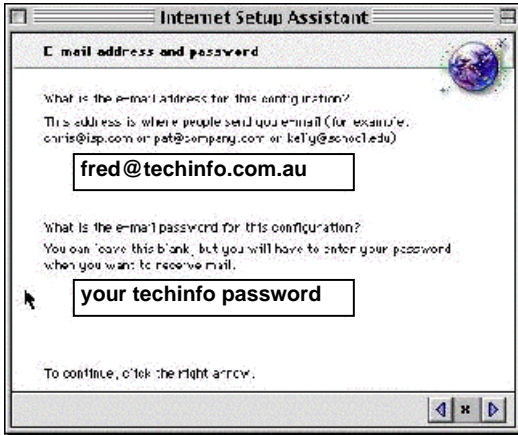

On this screen you will be asked for your email address, type in **'your username'@techinfo.com.au** (or **'your username'@gravity.net.au** or **'your username'@asccomp.net'**)

Next, type in your password in the field marked password.

To continue click on the arrow pointing right located at the bottom right hand of the screen.




In the field that asks for your POP account, type in:- **'your login username'@mail.techinfo.com.au**

and in the field it asks for the SMTP host, enter

**mail.techinfo.com.au**

To continue click on the arrow pointing right located at the bottom right hand of the screen.

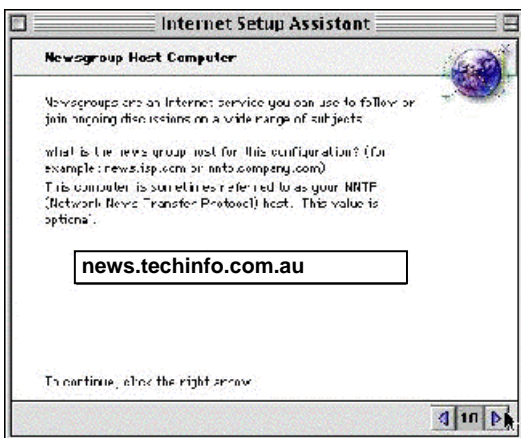

In the field that asks for your NEWS server name, type in:- **news.techinfo.com.au**

To continue click on the arrow pointing right located at the bottom right hand of the screen.

To complete the configuration of Macintosh OS 8.0 for the Internet click on the button labelled **'Go Ahead'**.